


Technical Data Sheet: ZDP8052HP

Double Sided PET Tape



ZDP8052HP is a transparent double sided tape consisting of ultra-thin polyester film coated with a high-performance acrylic based pressure-sensitive adhesive and a high quality release liner. The tape is specially designed for display market application, mobile phone system assembly applications, notebook component set-up and so forth.

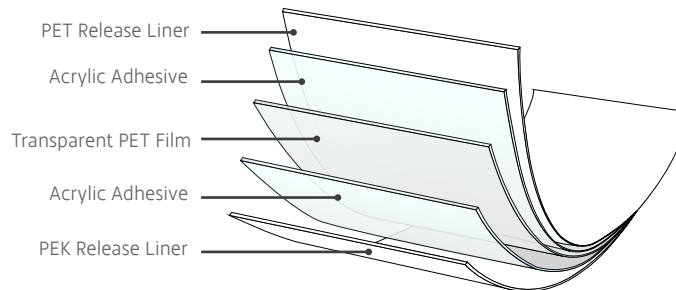

Characteristics

- Excellent adhesion and holding power
- Excellent die-cutting performance and temperature resistance
- Good bonding effect on different plastic films, hardware or painted plate

Applications

- Suitable to be used for mounting module and metal frame
- Also used for mounting in mobile phones, digital components and decorative parts in furniture and metal sheets

Properties

Properties	ZDP8052HP	Standard
Tape Colour	Transparent	-
Tape Thickness (μm)	55 ± 10%	-
180° Peel Adhesion to Steel (30mins dwell) (g/25mm)	> 1600	ASTM D3330
Holding Power (0.5kg/inch, 60°C) (Hrs)	> 72	JIS Z 0237
Temperature Range (°C)	-40 ~ 120	-