


Technical Data Sheet: ZDP8100B

Double Sided Filmic Tape



ZDP8100B is a black double coated filmic tape, constructed with PET carrier and modified solvent acrylic adhesive. With reliable bonding effect and especially good bond strength. Quick applicable capability right after processing, can be applied in various kinds of applications, such as heavy load, critical materials etc.

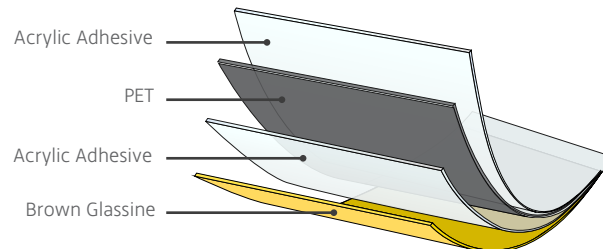

Characteristics

- Reliable bonding effect, especially good bond strength
- Quick applicable capability right after processing

Applications

- Applied in nameplates or back-light module of LCD display on mobile assembly or metal parts

Properties

Properties	ZDP8100B	Standard
Tape Colour	Black	-
Tape Thickness (μm)	100	-
Peel Adhesion to Steel (Dwell time 20 mins) (N/24mm)	≥ 11	GB/T2792-2014
Static Shearing (Holding Power) (24 x 24mm) (1000g, 5.76cm ²) (min)	≥ 1440	GB/T4851-2014
Initial Tack (Rolling Ball) (mm) (14# Steel Ball)	≤ 100	GB/T4852-2002
Solvent Resistance	Good	-
Temperature Resistance (°C)	120	