


Technical Data Sheet: ZDP8185-125DL

Double Sided PET Tape with Double Liners



ZDP8185-125DL is a transparent double coated adhesive tape consist of PET backing and tackified acrylic adhesive laminated both sides with PEK release liners. ZDP8185-125DL provides strong adhesion and good electrical insulation especially suitable to be use as spacer tape for the membrane switch inlays.

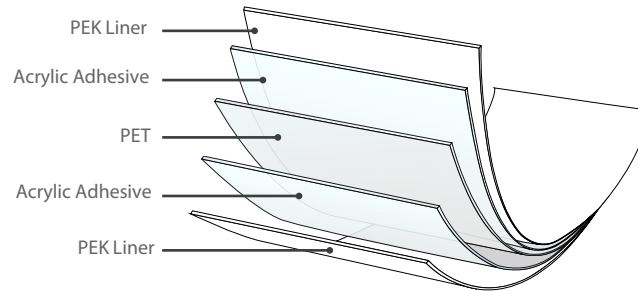

Characteristics

- Excellent adhesion on various kinds of plastic materials and metal surfaces
- Excellent electrical insulation
- Very good temperature resistance
- Excellent dimension stabilities for die-cut process
- Double PEK release liner provides readily condition for converting and die cut

Applications

- As spacer tape for membrane switches and inlays.
- Mounting of component parts in home appliances, consumer electronics and automotive
- Name plate lamination

Properties

Properties	ZDP8185-125DL	Standard
Tape Thickness (μm)	185	-
180° Peel Adhesion (30mins dwell) (N/25mm) Steel	≥ 11.00	ASTM D3330
Holding Power (1kg, 25mmx25mm) (Hr)	> 10	PSTC-7
Temperature Resistance ($^{\circ}\text{C}$)	80	-