


Technical Data Sheet: ZDT8164HT

Double Sided Tissue Tape



ZDT8164HT is a double-sided adhesive tape which are specially design for bonding of paperboard, foam, felt and nameplate application. Double-sided adhesive tape **which** is impregnated with a tackified pressure-sensitive adhesive on the flexible tissue, laminated on dimensional stable PEK liner.

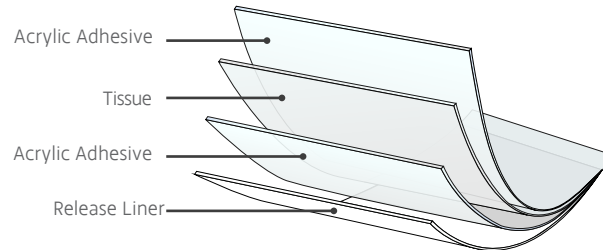

Characteristics

- Very good adhesion level on various kinds of plastic materials, foams and metal surfaces
- Very good repulsion resistance and prevents lifting of curvature surface
- Good adhesion on LSE substrate
- Excellent temperature & heat resistance
- Dimensional stable liner provides excellent workability for full or half cut during die cut process

Applications

- Paper box closure
- Mounting of plastic and foam parts for E&E and automotive industries
- Lamination of nameplates for electrical appliances

Properties

Properties	ZDT8164HT	Standard
Tape Thickness (µm)	160	-
180° Peel Adhesion (30mins dwell) (N/25mm) Steel	≥ 16.00	ASTM D3330
Holding Power (1kg, 25mmx25mm) (Hr)	> 48	PSTC-7
Temperature Resistance (°C)	150	-