


Technical Data Sheet: ZT8035

Transfer Tape



ZT8035 is a transfer tape which consists of a unique pressure-sensitive acrylic adhesive and a high quality release liner. It provides a better way for applications requiring excellent adhesion power and good environment reliability. It is also suit for many kinds of substrate such as conductive fabric, copper foil, aluminum foil, Poron etc.

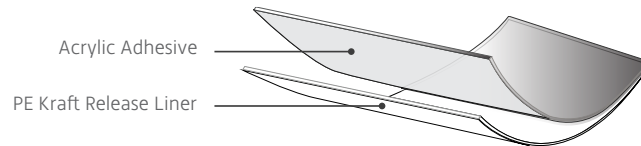

Characteristics

- Superior adhesion to many kinds of substrates
- Excellent environment reliability
- Thinner and stable

Applications

- Suitable to be used for die cutting and laminating
- Bonding to nameplate, signboard, footpad etc.

Properties

Properties	ZT8035	Standard
Adhesive Type	Acrylic	-
Adhesive Thickness (μm)	35	-
Release Liner Type	PE Kraft Release Liner	-
180° Peel Adhesion to SUS (30mins dwell) (N/cm)	> 3.92	ASTM D3330
Holding Power (500g, inch ² , 60°C) (Hr)	24	JIS Z 0237