


Technical Data Sheet: ZT8063

Transfer Tape

ZT8063 is a transfer tape (non-carrier) which consist of high-performance acrylic adhesive coated on dimensional stable release liner.

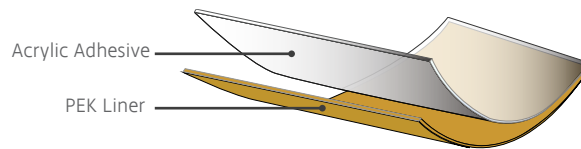

Characteristics

- High adhesion to metal, glass and various plastic and painted surfaces
- High resistance to static stress and dynamic stress
- Excellent aging resistance and temperature resistance
- Good die cutting performance

Applications

- It is used for the bonding of panels, electrical component parts, and foam
- Suitable for bonding on metal plates, plastic plates and card board
- Nameplate fixing, logo plate and foam lamination
- Membrane switch fixing

Properties

Properties	ZT8063
Adhesive Type	Acrylic
Adhesive Thickness (μm)	60
Release Liner Type	PEK Liner
180° Peel Adhesion to SUS (30mins dwell) (N/25mm)	≥ 13
Static Shear Force (1000g, 25mm x 25mm, RT) (Hrs)	≥ 24
Temperature Resistance (°C)	120